HS 2/50-240

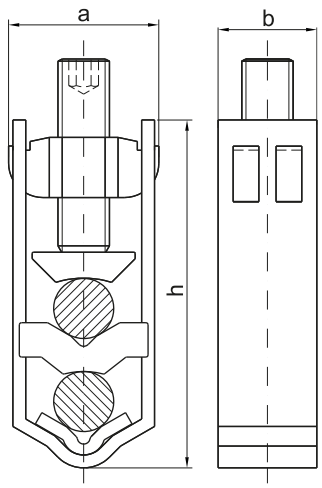

HS 2/50-240-B

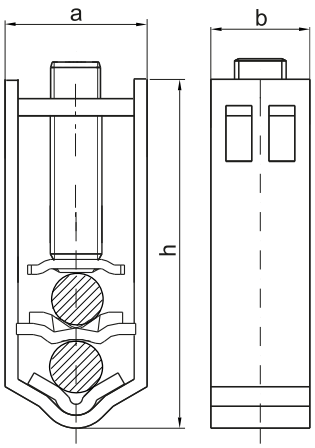

sm - multiwire sector shaped conductor (flexible)

rm - round multiwire conductor (flexible)

se - sector shaped conductor (rigid)

re - round conductor (rigid)

DETAIL	CROSS-SECTION [mm²]				NOMINAL CROSS-SECTION [mm²]	TIGHTENING TORGUE [Nm]	DIMENSIONS		
	sm	se	rm	re			a	b	h
HS 2/50-240	50-185	50-240	35-150	35-185	185	40	35	22	81
HS 2/50-240-B	35-240	35-300	35-300	50-185	185	40	35	22	81

	HS 2/50-240	HS 2/50-240-B
clamp	brass - tin plated	steel zinc-plated
housing	spring steel zinc-plated	
screw	steel zinc-plated	
compression plate	brass - tin plated	
nut	brass - tin plated	spring steel zinc-plated

* Screw clamps have safety sign 'B' WG PN-EN 60947-7-1, (IEC 60947-7-1)