







It has two opening points:

- Mechanical - cylinder with a patent key for emergency opening in case of power failure
- Electronic - built-in micro servo


Technical data:

- RFID technology
 - 4-digit PIN code
 - Compatible with the access control system EMI-One
 - Built-in handle position sensor in the lock for warning purposes the user to leave the lock open when the cabinet door is closed.
 - Power supply for 12V DC lock
 - Built-in buzzer for lock action signaling
 - LED indicating the lock status
 - Storage of login information Minimum 10 years
-
- The RS-E.001.M lock cooperates with the cogwel mechanism MZ2 (pp. 1C-30 to 1C-31)
 - The RS-E.001.N lock cooperates with the 1C.902.001 cover plate.(pages 1C-26) and with cams 1-point from group 11, 13

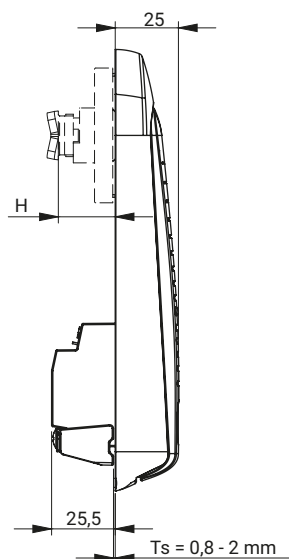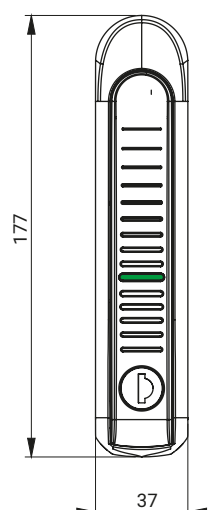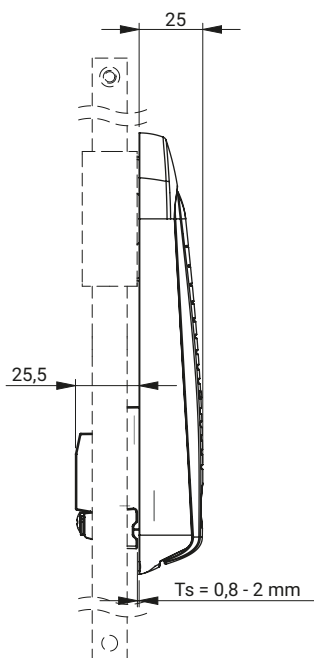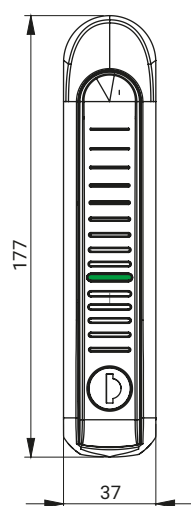

**RS-E.001.N****RS-E.001.M**

Mounting hole

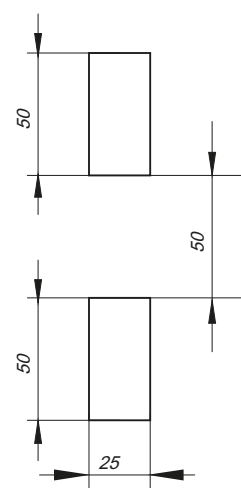

Power supply : 12V DC.

Lock RS-E.001MZ is compatible with cogwheel mechanism MZ2 (pg 1C-30 to 1C-33) - should be ordered separately.

Lock RS-E.001N is compatible with a cap 1C.902.001 (pg 1C-27)

and cams: 1-point from group 11, 13 (pg 1C10, 1C-11) - should be ordered separately.

* EMI access control equipment to be ordered separately

TYPE OF LOCK	COMPONENTS	MATERIAL	FINISH [C]
			RAL 9005
RS-E.001.N RS-E.001.M	Handle, housing	PA6 GF30	07
CONFIGURATIONS OF ACCESS ARE POSSIBLE			
DESCRIPTION			CONFIGURATIONS
key	Standard lock		001
key + RFID card	Stand-alone version with RFID system		002
key + keypad	Stand-alone version with keypad lock		003
key + EMI	Electronic lock with EMI* control system		004
key + RFID card + EMI	Electronic lock with EMI* control system		005

How to order:

Type of lock

Configurations of access

Finish

