Busbar clamp type v-klema HS 20

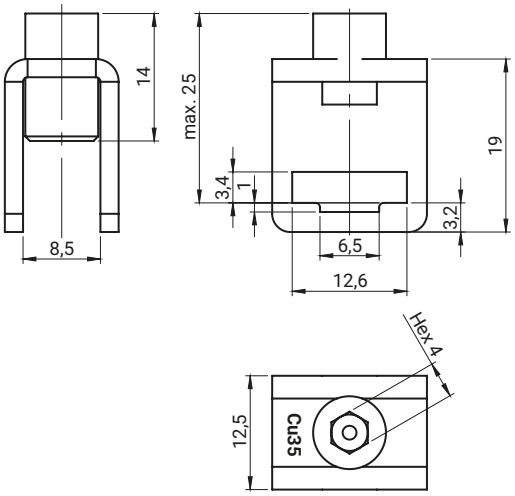



re - round conductor (rigid)

rm - round multiwire conductor (flexible)

CATALOGUE NUMBER	COMPONENTS	MATERIAL
HS 20	Housing, Screw	Steel zinc-plated

TECHNICAL DATA	
Busbar thickness:	2-3 mm
Busbar width:	10 mm
Suitable for / Application:	Flat busbar
Clamp width:	12,5 mm
Conductor cross-section:	2,5 - 35 mm²
Product series:	N/PE
Max. rated operational current Ie:	135 A
Suitable for round conductor connection:	Yes
Suitable for sector conductor connection:	No
Suitable for strip conductor connection:	No